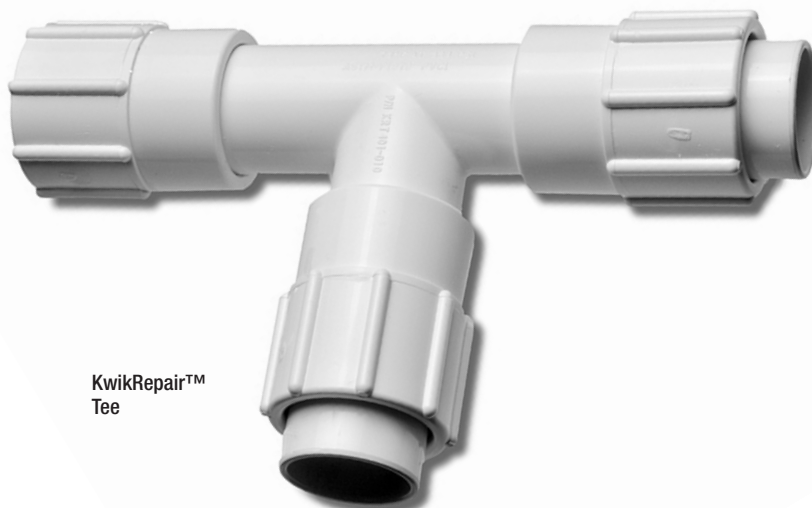


KwikRepair™

Professional Quality

A simple solution for in-line PVC installation and repairs with one fitting. Its sleeve slides onto the pipe, allowing primer and solvent to be applied without bending—eliminating the need to dig long trenches and flex the pipe to fit regular couplers and tees.



KwikRepair™
Tee

Features

- Permanent & reliable solvent-weld seal without O-rings
- No thrust blocking or staking needed
- Ideal for repairs in tight spaces
- No installation tools required
- Available in coupling sizes ½" through 4" and tees from ½" through 2"
- Patented (US Patent #6318761)
- Made in USA

Applications


PVC repairs in agriculture & commercial irrigation applications.


Specifications

	Size		Collapsed		Extended		O.D.	
	in	mm	In	mm	In	mm	In	mm
Tees								
KRT401-005	1/2	15	6	152	7.5	191	1.2	31
KRT401-007	3/4	20	6.5	165	8.7	220	1.5	37
KRT401-010	1	25	7.4	188	9.8	249	1.8	46
KRT401-012	1 1/4	32	8.2	207	11.7	297	2.1	54
KRT401-015	1 1/2	40	10.2	259	13.2	335	2.4	60
KRT401-020	2	50	10.1	279	14.0	356	2.9	73
Couplers								
KRC429-005	1/2	15	3.9	99	5.8	146	1.2	31
KRC429-007	3/4	20	4.3	108	6.4	162	1.5	37
KRC429-010	1	25	4.8	122	6.9	175	1.8	46
KRC429-012	1 1/4	32	5.5	139	7.7	197	2.1	54
KRC429-015	1 1/2	40	6.4	163	9.4	239	2.4	60
KRC429-020	2	50	6.7	170	9.9	251	2.9	73
KRC429-025	2 1/2	65	8.9	225	12.4	314	3.5	90
KRC429-030	3	80	9.7	246	14.0	356	4.2	106
KRC429-040	4	100	10	255	14.2	361	5.2	132

Installing KwikRepair™ Coupler

- 

Use fitting as guide to ensure exact fit.
- 

Install fitting and dry fit couplers.
- 

Slide one coupler back at a time. Prime and glue both fitting body and pipe.
- 

Twist coupler back onto glued pipe until arrows on fitting are fully exposed. Hold until set*

**Refer to the solvent manufacturer's instructions for the recommended set time before pressurizing the pipe.*

Ordering Information - KwikRepair™ Tees

Description	Part Number	Pack Quantity	Units Per Carton
PVC Repair Tee 1/2" x 1/2" x 1/2"	KRT401-005	1	10
PVC Repair Tee 3/4" x 3/4" x 3/4"	KRT401-007	1	10
PVC Repair Tee 1" x 1" x 1"	KRT401-010	1	10
PVC Repair Tee 1 1/4" x 1 1/4" x 1 1/4"	KRT401-012	1	5
PVC Repair Tee 1 1/2" x 1 1/2" x 1 1/2"	KRT401-015	1	5
PVC Repair Tee 2" x 2" x 2"	KRT401-020	1	5

Ordering Information - KwikRepair™ Couplers

Description	Part Number	Pack Quantity	Units Per Carton
PVC Repair Coupler 1/2" x 1/2"	KRC29-005	1	10
PVC Repair Coupler 3/4" x 3/4"	KRC29-007	1	10
PVC Repair Coupler 1" x 1"	KRC29-010	1	10
PVC Repair Coupler 1 1/4" x 1 1/4"	KRC29-012	1	10
PVC Repair Coupler 1 1/2" x 1 1/2"	KRC29-015	1	10
PVC Repair Coupler 2" x 2"	KRC29-020	1	5
PVC Repair Coupler 2 1/2" x 2 1/2"	KRC29-025	1	5
PVC Repair Coupler 3" x 3"	KRC29-030	1	5
PVC Repair Coupler 4" x 4"	KRC29-040	1	5

Performance Chart

Diameter		Working pressure rating @ 73° F (22° C)	
Inches (in)	Millimeters (mm)	psi	kPa
1/2	15	450	3103
3/4	20	360	2482
1	25	338	2330
1 1/4	32	278	1916
1 1/2	40	248	1710
2	50	210	1448
2 1/2	65	225	1551
3	80	195	1344
4	100	165	1138



KwikRepair™ Coupler



Watch the Video

Scan this QR code to watch the video

